
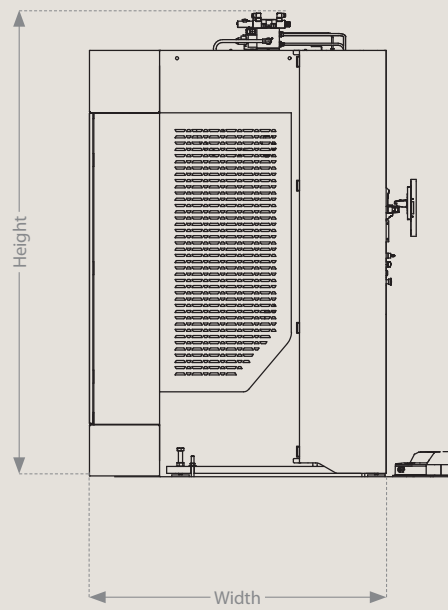


Technical Data

Xpress

	Xpress 50/1050	Xpress 80/2100	Xpress 100/3100	Xpress 160/3100	
Length	1680	2740	3740	3740	mm
Width	1710	1850	1850	1850	mm
Height	2680	2680	2800	2800	mm

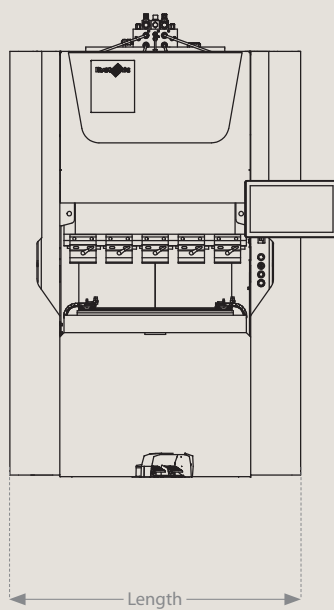

Type	Xpress 50/1050	Xpress 80/2100	Xpress 100/3100	Xpress 160/3100	
Tonnage	500	800	1000	1600	kN
Bending length	1050	2100	3100	3100	mm
Standard stroke	200	200	250	250	mm
Open height	500	500	550	550	mm
Distance between the side stands	1100	2150	3150	3150	mm
Table width	60	60	60	60	mm
Max. backgauge range in X	500	800	800	800	mm
X-axis travel	300	500	500	500	mm
X-axis speed	400	400	400	400	mm/s
X-axis accuracy	0.05	0.05	0.05	0.05	mm
R-axis travel	100	100	100	100	mm
R-axis speed	100	100	100	100	mm/s
R-axis accuracy	0.05	0.05	0.05	0.05	mm
Z-axis travel	650	1300	2300	2300	mm
Z-axis speed	600	600	600	600	mm/s
Max. Y-rapid traverse	150	150	150	150	mm/s
Max. Y-working speed	10	10	10	10	mm/s
Y-axis accuracy	0.01	0.01	0.01	0.01	mm
Oil capacity	105	180	250	250	l
Main motor power	4	7.5	7.5	11	kW
Weight	3.5	6	8	9	t

The right to make changes to dimensions, construction, and equipment is reserved. ISO-9001-certified.

Bystronic: Best choice.

Cutting | Bending | Automation
bystronic.com